

## Cable Overview

- 1.5m length
- 8 pin connector (6 active) to sensor
- To bare wires at other end
- 8x 24AWG core cable
- Overall cable diameter 7mm
- Complies with RoHS2 (2011/65/EU)


FT009



FT74X-SM



## Technical Details

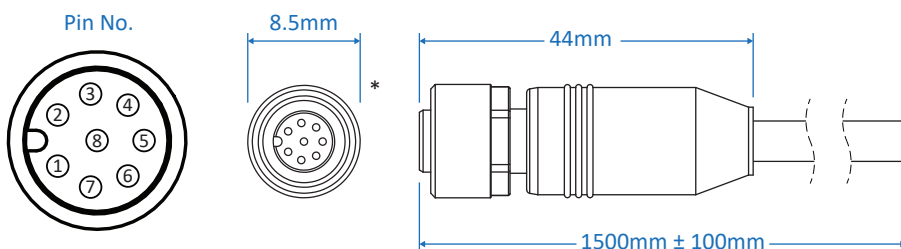

Wire Connections (7-8 Not Connected)

Pin No.	Colour	RS422	RS485
1	Brown	0V Supply	0V Supply
2	White	+Ve (6-30 VDC)	+Ve (6-30 VDC)
3	Blue	Tx Data A -	N/C
4	Black	Rx Data A -	Data A -
5	Grey	Tx Data B +	N/C
6	Pink	Rx Data B +	Data B +

### Specification

Part No.	FT009
Use with	FT74X-SM
Length	1.5 m
Temp Range	-40 to +80 (°C)
Weight	0.1 kg
Min bend radius	70 mm
Rated to	30VDC / 2A
Ind. wire diameter	0.25mm <sup>2</sup>

For further details contact FT  
sales@fttechnologies.com

\*View looking into socket contacts of free plug. All dimensions are approximate.