


# FT054 Acu-Test (Digital)



FT Technologies Acu-Test Pack makes it easy to communicate with and test digital wind sensors. The Acu-Test Pack consists of the FT054 cable and the FT Acu-Vis software. The FT054 cable supports:

- FT702LT (V20 and V22) RS485 sensors (no 4-20mA support)
- FT722-D, FT742-D, FT723-D and FT743-D (FF, PM, DM and DM50 variants only)

## INCLUDED IN THE PACK

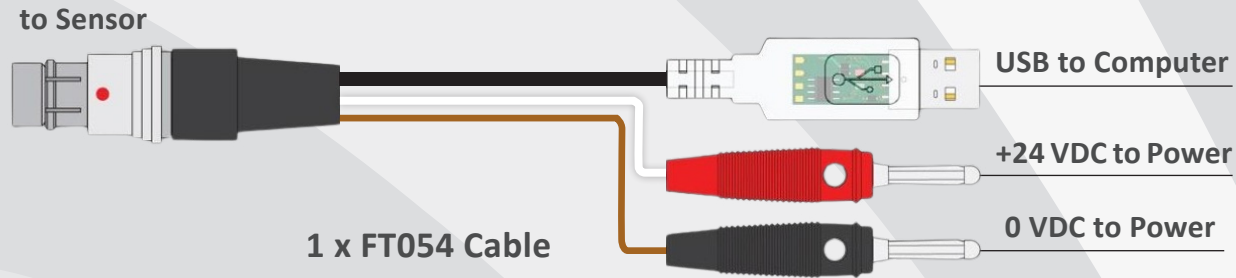

Each cable is labelled with a unique serial number and build date to ensure quality and traceability. Cable accessories include a protection cap for sensor connector and an adjustable rubber sleeve to keep the wires tidy. For the latest Acu-Vis software please contact [techsupport@fttechnologies.com](mailto:techsupport@fttechnologies.com)

## YOU WILL ALSO NEED



Sensor (A)



Power Source (B)



Computer (C)

- This equipment can only be used to test the FT702LT, FT722-D, FT723-D, FT742-D, or FT743-D (FF, PM, DM, and DM50 variants) range of digital output wind sensors.
- Use a bench power supply unit, 12-30 VDC (current limit up to 6A), or the FT062 (24 VDC) power supply.
- Acu-Vis software supports Windows XP, Vista, 7, 8, 8.1, 10 and 11.

**Warning: Live connection/disconnection of the power and/or sensors during live operation, or miswiring of the power leads could damage the equipment and is not covered by FT's standard warranty terms.**

## KEEPING IT SIMPLE

This software is to be used as a simple way to test the wind speed and direction functionality of the FT Technologies digital range wind sensors. It can also change a number of commonly altered settings such as heater set point and averaging filters. For full details on Acu-Vis software operation and various configuration settings, please contact FT Technical Support.